


Geberit Monolith Plus sanitary module for wall-hung WC, 114 cm, front cladding made of glass

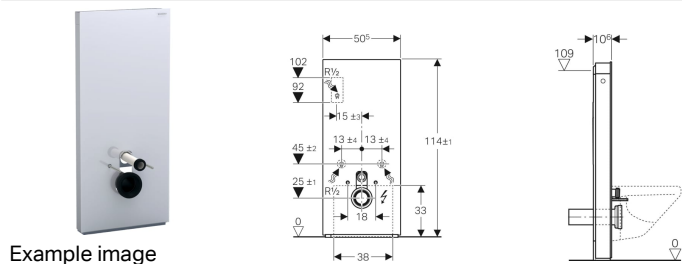

Application purposes

- For renovations, conversions and new buildings
- For wall inlets with inlet height > 23 cm
- For replacing low-level exposed cisterns
- For replacing half-high level exposed cisterns
- For replacing wall-hung WCs with close-coupled exposed cistern
- For replacing wall-hung WCs with pressure flushing valve
- For replacing wall-hung WCs with concealed cistern with maximum service opening height < 109 cm
- For Geberit AquaClean WC complete solutions
- For connecting Geberit AquaClean WC enhancement solutions, with accessories
- For mounting on finished floors
- For installation in front of drywalls or solid walls
- For compensating the offset between WC connections and wall drains using a stepped straight connector for wall-hung WCs

Characteristics

- Dual flush
- Compensation of dimensional tolerances possible
- Height-adjustable up to 7 cm
- Fastening height WC ceramic appliance 35 ± 1 cm
- Cistern, fully insulated against condensation
- Side cladding made of aluminium brushed
- Self-supporting
- Soft-touch buttons for flush actuation and odour extraction

Scope of delivery

- Water supply connection set with 2 angle stop valves, 1/2"
- Flush bend extension 160 mm
- Sleeve made of EPDM, $\varnothing 44 / 55$ mm
- Straight connector made of PE-HD, $\varnothing 90$ mm
- Adapter socket made of PE-HD, $\varnothing 90 / 110$ mm
- 2 threaded rods M12
- Sound insulation set

- Orientation light and odour extraction activated when a user approaches
- Orientation light can be set in seven colours
- Day/night detection can be set for orientation light
- Odour extraction unit with ceramic honeycomb filter can be installed without tools
- Odour extraction unit automatically switches off after a predefined running time
- Operation with extra-low voltage, no mains voltage in cistern
- Water supply connection on the rear centre
- Water supply connection on the left/right possible with accessories
- Water supply connection on the bottom

Technical data

Protection degree	IPX4
Protection class	I
Nominal voltage	100-240 V AC
Mains frequency	50-60 Hz
Operating voltage	4.1 V DC
Power consumption	5 W
Flow pressure	0.1-10 bar
Flush volume	6 l
Flush volume small	3 l

- Female socket for mains connection
- Power supply unit
- Base cover
- Fastening material for drywall
- Fastening material
- Fastening material for installation in front of concealed cisterns

Art. no.	Colour / surface	B	H	T	
131.231.SI.5	Front cladding: white glass Side cladding: aluminium	50.5 cm	114 cm	10.6 cm	
131.231.JK.5	Front cladding: lava glass Side cladding: black chrome aluminium	50.5 cm	114 cm	10.6 cm	New
131.231.JL.5	Front cladding: sand grey glass Side cladding: aluminium	50.5 cm	114 cm	10.6 cm	New
131.231.SJ.6	Front cladding: black glass Side cladding: black chrome aluminium	50.5 cm	114 cm	10.6 cm	New

Accessories

- Geberit straight connector set for wall-hung WC, stepped by 3 cm

- Geberit straight connector set for wall-hung WC, stepped by 7 cm
- Geberit outlet mounting box
- Lateral water supply connection set for Geberit Monolith sanitary module for WC